


Dizalice - karakteristike

- ◆ ***sila nošenja***,
- ◆ ***visina dizanja*** (200 - 2000 mm),
- ◆ ***energetski izvor***:
 - čovek: direktno i preko hidraulične pumpe,
 - električna energija:
 - ◆ direktno (EM),
 - ◆ preko energije vazduha pod pritiskom (EM+kompresor),
 - ◆ preko energije vazduha i tečnosti (EM+kompresor+hidraulični cilindar),
 - ◆ preko energije tečnosti (EM+hidraulična pumpa),
 - toplotna energija
 - ◆ motor SUS - na mestima gde je u predhodnom slučaju bio EM

Dizalice sa kratkim hodom (do oko 600 mm) za podizanje samo jednog točka ili jedne strane vozila

- ◆ *ručna mehanička* dizalica sa zavojnim vretenom i parom koničnih zupčanika (sila dizanja $F=8$ do 20 kN) ili sa 4 poluge i zavojnim vretenom (8 do 10 kN),
- ◆ *hidraulična dizalica* ($F=5$ do 200 kN; visina dizanja $h=450$ do 800 mm) i
- ◆ *pneumatska dizalica* ($F=15$ kN; $h=200$ mm).

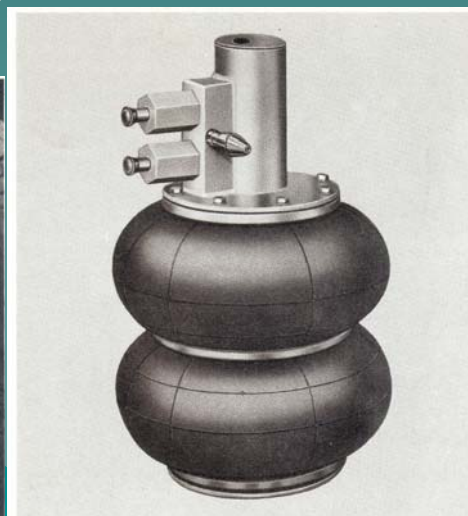

Dizalice sa kratkim hodom (do oko 600 mm) za podizanje samo jednog točka ili jedne strane vozila

mala hidraulična dizalica – podiže hidrauličnim cilindrom pumpanjem ulja pomoću poluge, a otvaranjem ispusnog ventila vraća se u početni položaj



Dizalice sa kratkim hodom (do oko 600 mm) za podizanje samo jednog točka ili jedne strane vozila

garažna hidraulična dizalica (krokodilka) – podiže deo vozila; imaju noseći ram sa točkićima, a podizanje vrše pumpanjem ulja u hidraulični cilindar koji deluje na sistem poluga





Dizalice sa kratkim hodom (do oko 600 mm) za podizanje samo jednog točka ili jedne strane vozila

garažna konzolna hidraulična dizalica
(žirafa) – podižu deo vozila pomoću konzole na koju deluje hidraulični cilindar



Dizalice sa kratkim hodom (do oko 900 mm) za podizanje celog vozila

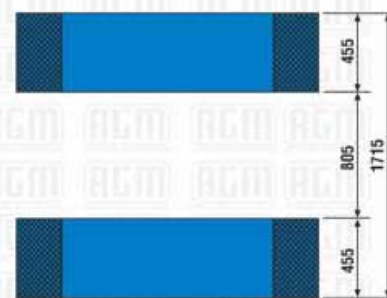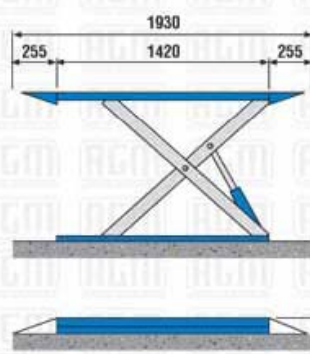

**Dizalice sa kratkim hodom
(do oko 900 mm) za
podizanje celog vozila**



Dizalice sa kratkim hodom (do oko 900 mm) za podizanje celog vozila



Dizalice sa dugim hodom (do 2000 mm) za podizanje manjih vozila (do približno 4t nosivosti)

- ◆ **jednostubne dizalice** ($h=1800\div 2000$ mm):
 - konzolne
 - ukopane
- ◆ **dvostubne dizalice** ($h=2000$ mm):
 - konzolne
 - ukopane
- ◆ **čtetvorostubne dizalice** ($h=1800$ mm)

Dizalice sa dugim hodom (do 2000 mm) za podizanje manjih vozila (do približno 4t nosivosti)

konzolne jednostubne dizalice




Dizalice sa dugim hodom (do 2000 mm) za podizanje manjih vozila (do približno 4t nosivosti)

ukopane jednostubne dizalice



Dizalice sa dugim hodom (do 2000 mm) za podizanje manjih vozila (do približno 4t nosivosti)


*konzolne
dvostubne
dizalice*

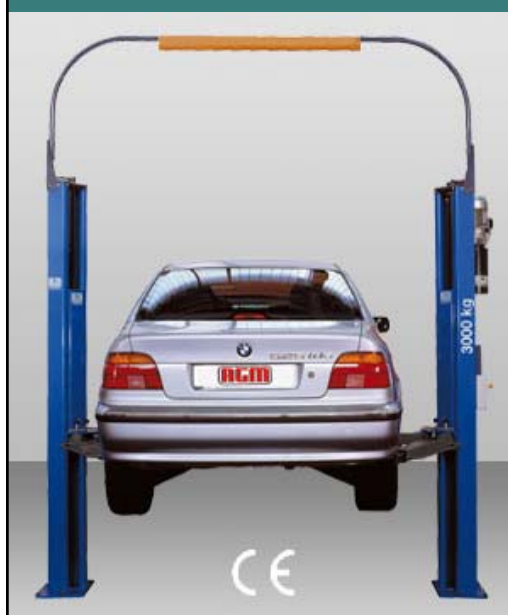




Dizalice sa dugim hodom (do 2000 mm) za podizanje manjih vozila (do približno 4t nosivosti)

konzolne dvostubne dizalice

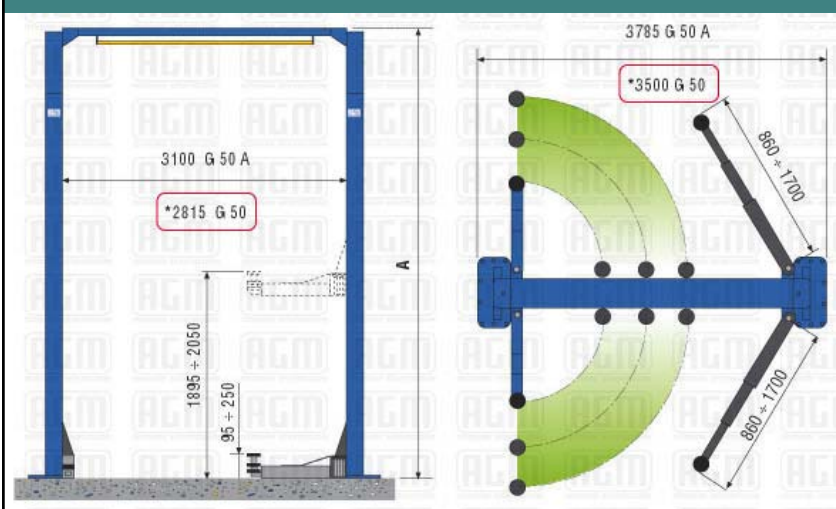

Dizalice sa dugim hodom (do 2000 mm) za podizanje manjih vozila (do približno 4t nosivosti)

ukopane dvostubne dizalice

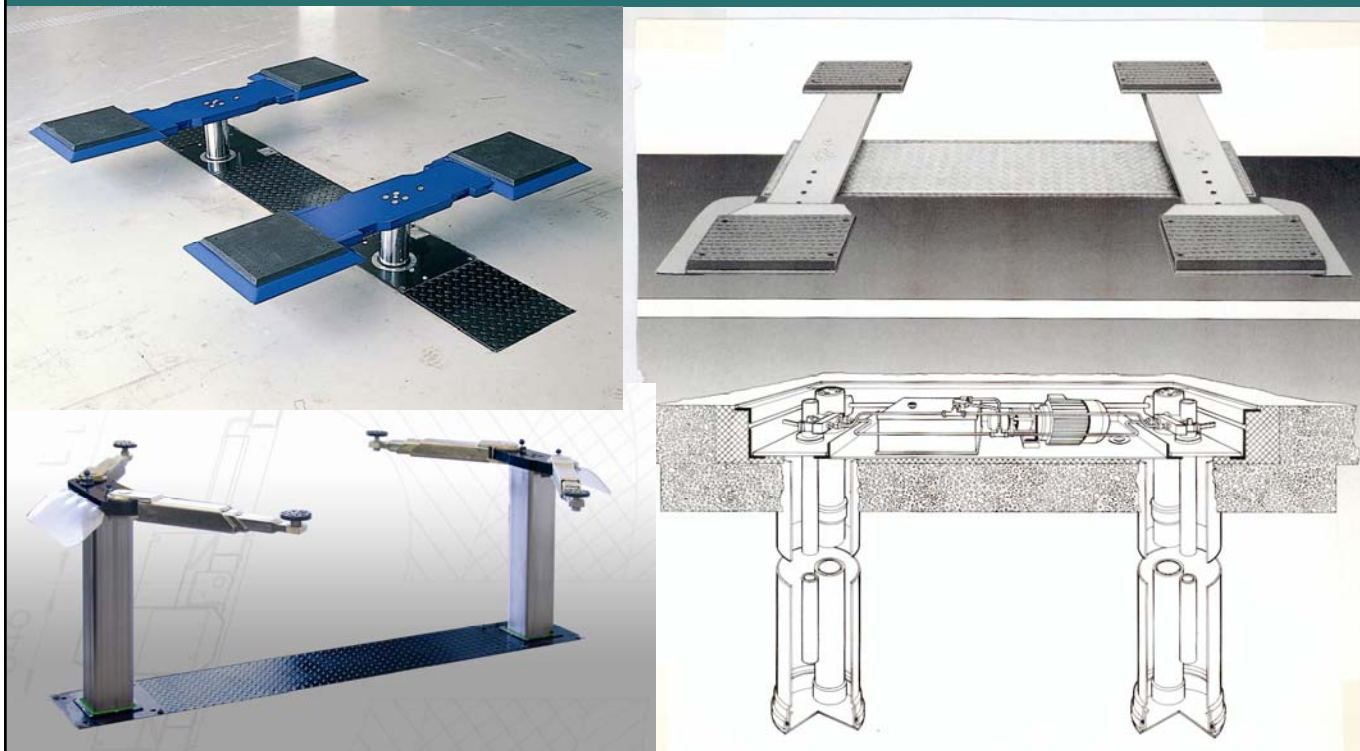



Dizalice sa dugim hodom (do 2000 mm) za podizanje manjih vozila (do približno 4t nosivosti)

čtetvorostubne dizalice





Dizalice sa dugim hodom za podizanje svih vozila

ukopane



Dizalice sa dugim hodom za podizanje svih vozila

ukopane

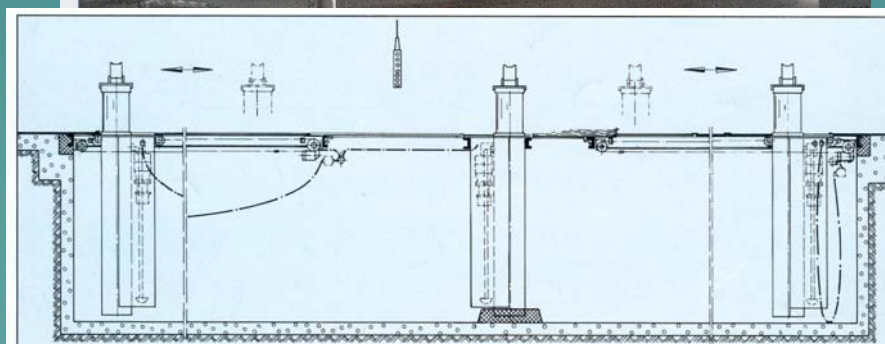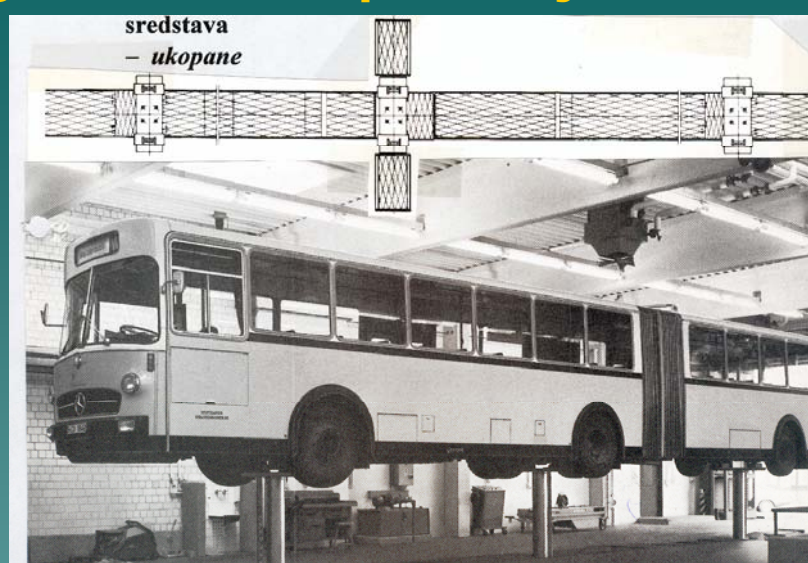

Dizalice sa dugim hodom za podizanje svih vozila

ukopane




Dizalice sa dugim hodom za podizanje svih vozila

platforme



Dizalice sa dugim hodom za podizanje svih vozila

platforme

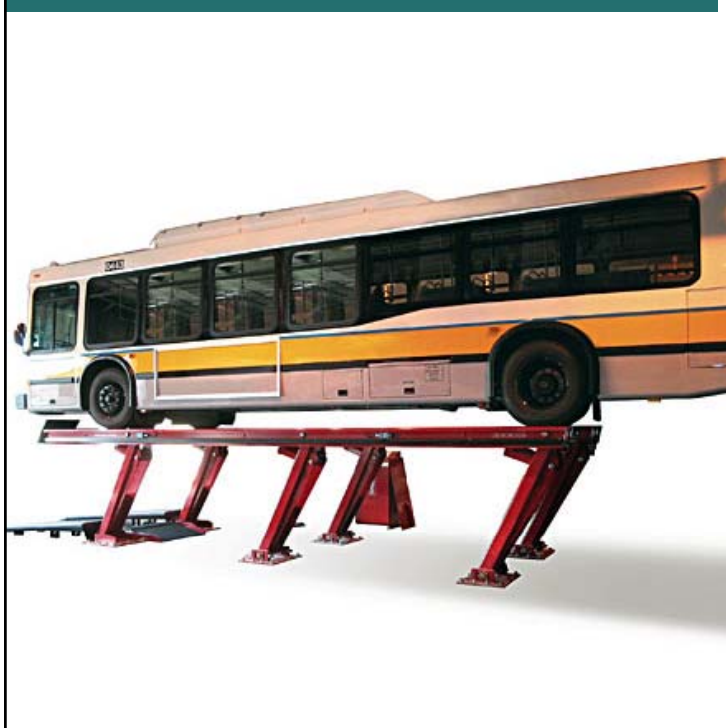

Dizalice sa dugim hodom za podizanje svih vozila




pokretne

Antriebsseinheit:

Hubmotor HB 7,5.3
Bestell-Nr. 101.3-7,5
Eigengewicht 50 kg
Pat. Kletterhebewerk
druckluftbetrieben
mechanisch arbeitend
mit automatischer
Lastsicherung
Druckluftbedarf
e Hubmotor
ca. 250 Normal-Liter
e Minute
Mindestdruck des Luftvorrates
9 bar
Antrieb und Steuerung
ein pneumatisch
Ex.-Schutz entfällt.

fahrbar auf
einer **Lenkrolle**
und zwei **Rädern**
Schwenkradius
570 mm

Grundgerät:

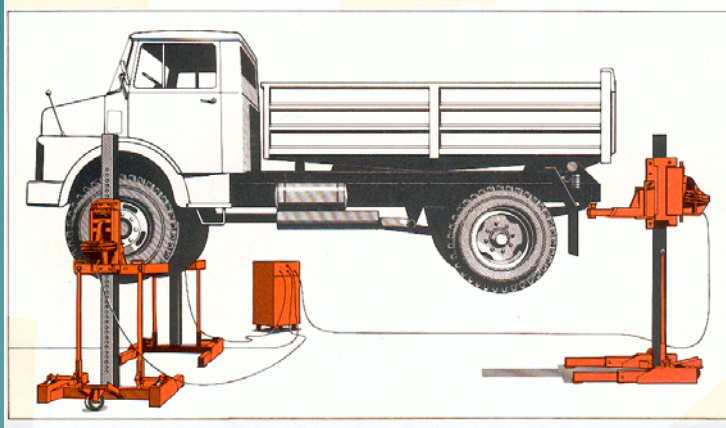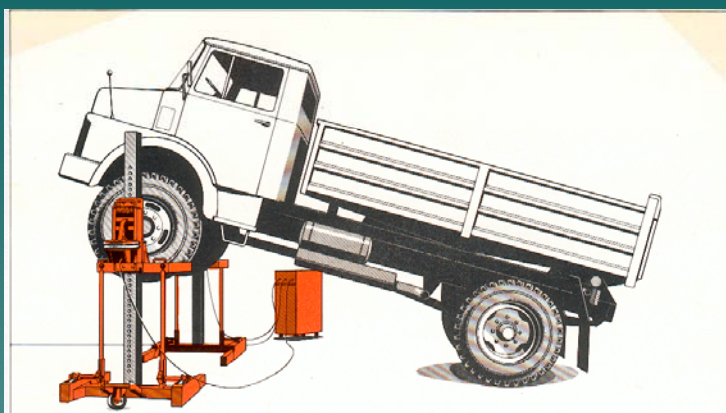
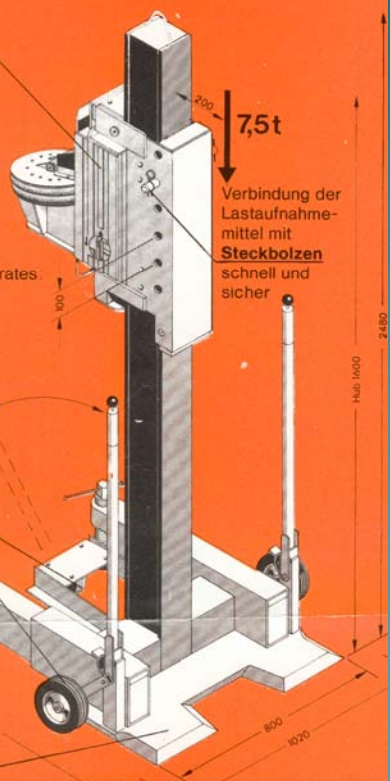


Dizalice sa dugim hodom za podizanje svih vozila

pokretne






Pomoční podupirači



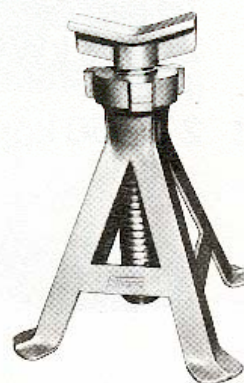
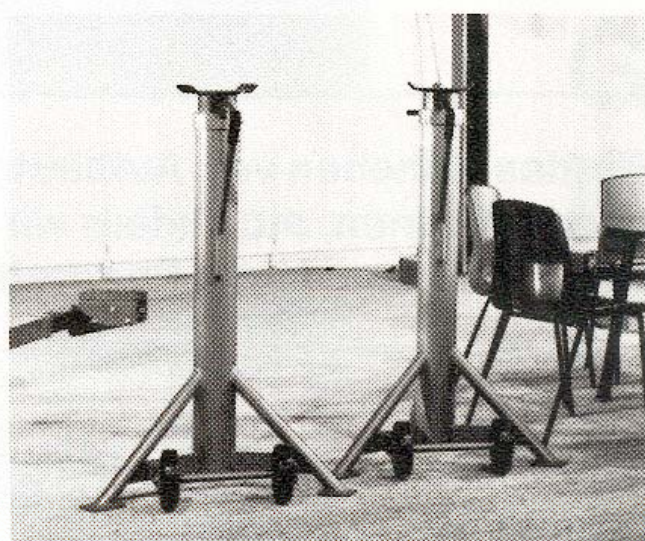


Kanalska dizalica



Kanalska dizalica

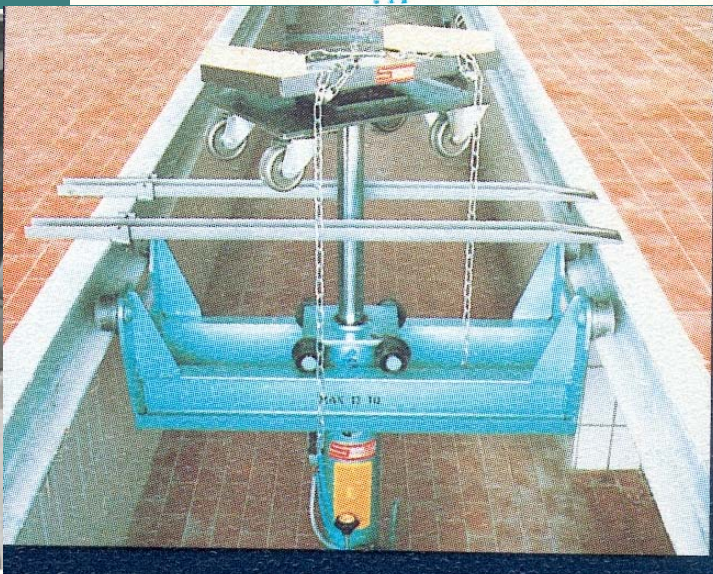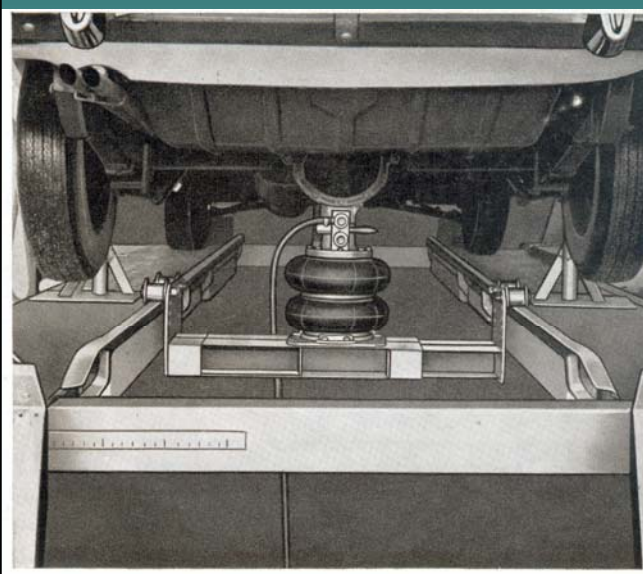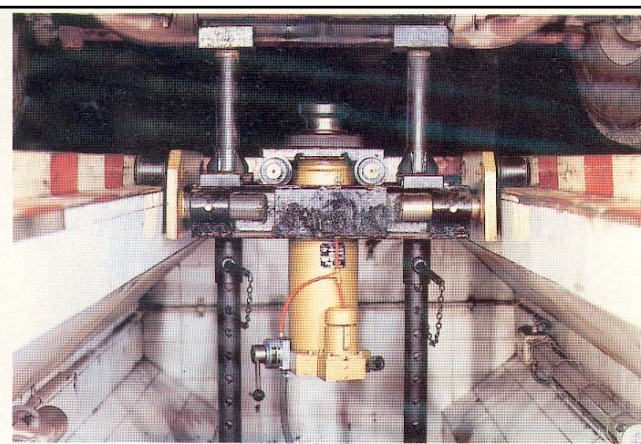

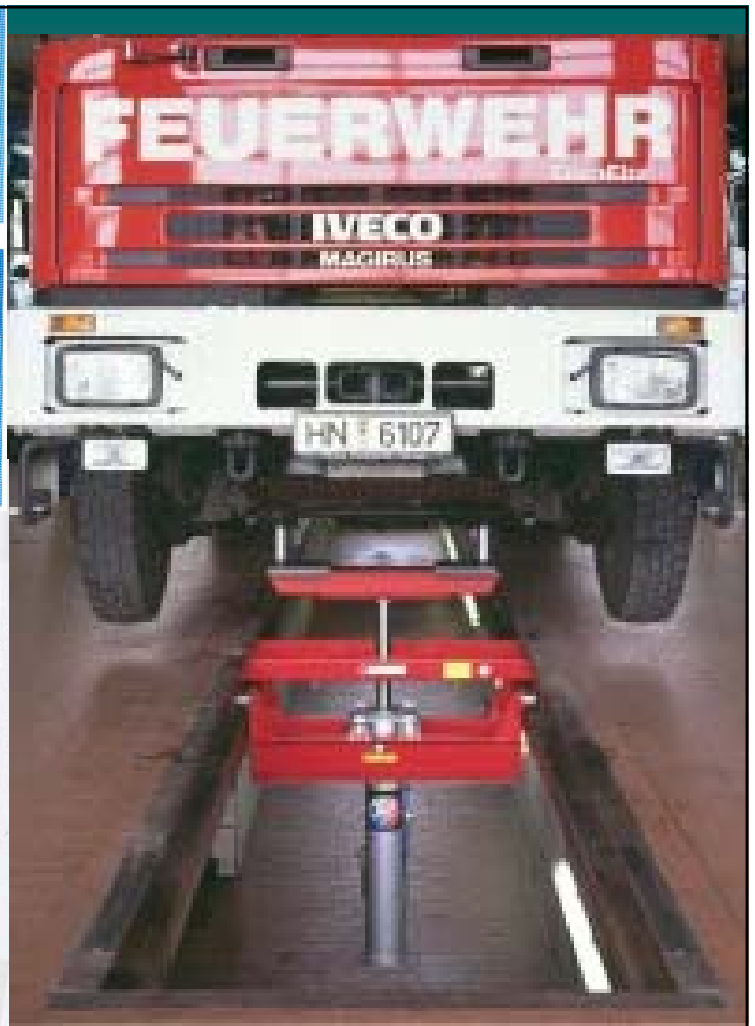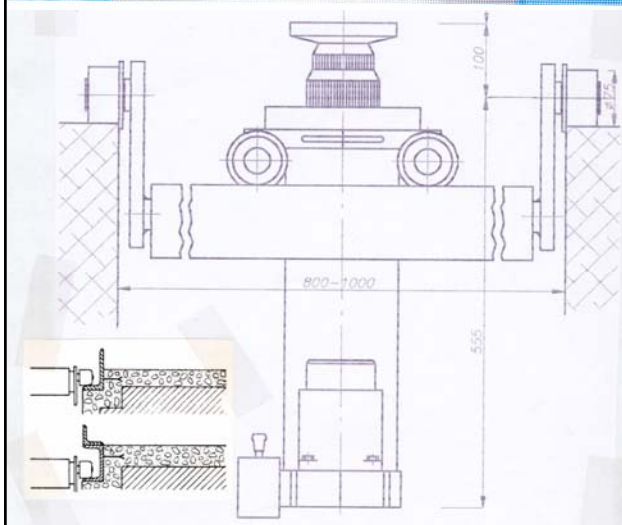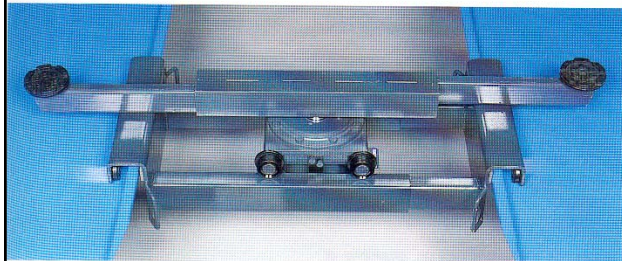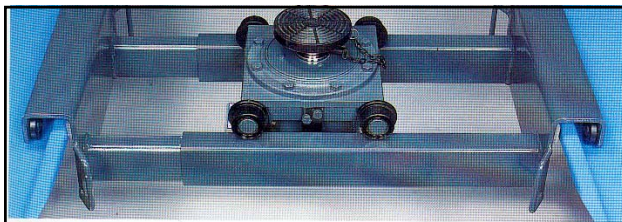

Standardne dizalične mašine

Koturače i čekrci

Mostovske dizalice

Portalne dizalice

Konzolne dizalice


Hidraulične platforme

Viljuškari







Specifications	67552	67558
Capacity, lbs.	1000	750
Low Height	61 1/2"	51 1/2"
High Height	20 3/4"	23 1/4"
Weight	118	88

Warning: The use of Car/Truck Stands is required when using these products.

Model 67376 car stands (shown on page 12) provide 30" of ground clearance and are recommended when using the transmission jacks shown above.

